





About Flexy Vacuum Cups

From my long experience buying vacuum cups, I know customers buying branded vacuum cups are paying a high price, which many realize, but they have difficulty sourcing less expensive, high quality product.

Casted PU-vacuum cups in dual durometer-style are considered the best performing polyurethane. Casted polyurethane has the ability to bridge the gap between rubber and plastic with its wide hardness range. Outstanding characteristics are tough, high abrasion resistance, fuel and oil resistance, high shock absorption, ozone and oxygen resistance, high resistance to cut initiation and cut growth. These qualities enhance life expectancy, which translates into savings in downtime.

So Flexy Vacuum Cups offers a simple opportunity:

To be your sourcing and logistic partner for high quality vacuums cups in polyurethane at competitive prices.

“ Klas Öhman, MD and owner Flexy Vacuum Cups. ”





COMBiFlex Vacuum Cups

Our "CombiFlex" Pu cups

We also have a unique process of bonding different hardness together which means you get a firm bellow/body in combination with a soft lip. This makes the cups stable and durable with excellent sealing properties.

It is very well known among vacuum users that the bellow cups like 1.5 & 2.5 are used all over the world in different material for different applications. However bellow in Dual hardness is more rare and unique. We can now offer you to complete your existing program with dual hardness. For bigger volumes you can also get them in your own company colors and of course customize your own dual hardness cup.



Vacuum Cups Applications

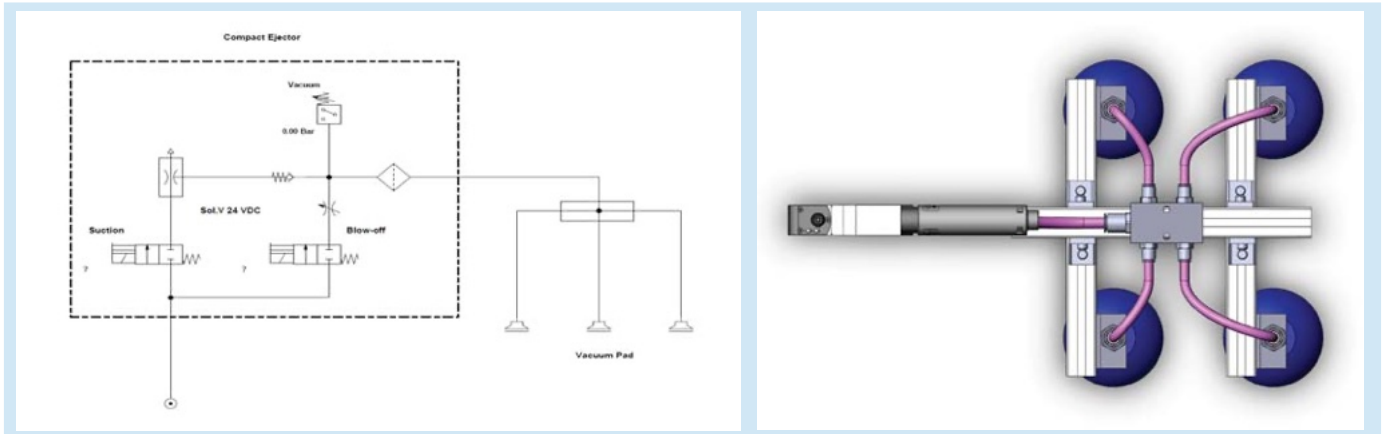
Our PU vacuum cups are widely used in automated automobile assembly plants, labelling and printing, plastic, packaging, robot, medical and pharmaceutical manufacturing, materials handling and many other industrial applications where pick-and-place methods are employed.

Whether on a short or long runs, for custom or standard design we can quote customized cups from your supplied drawings.


Vacuum Knowledge

Basic Vacuum Circuit Diagrams

Vacuum Knowledge



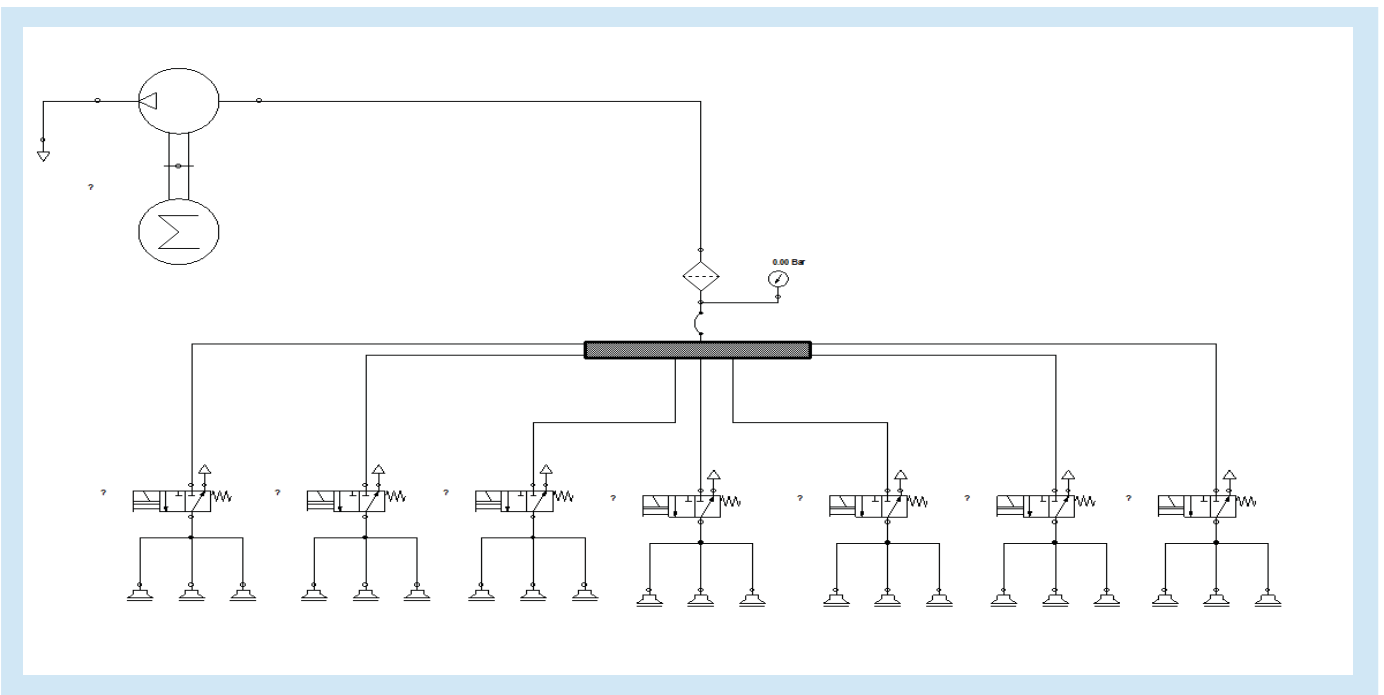Example : Basic Vacuum Circuit Diagrams with Compact Ejector



Example : Basic Vacuum Circuit Diagrams with Vacuum Pump

Vacuum Knowledge

Diameter of suction cup

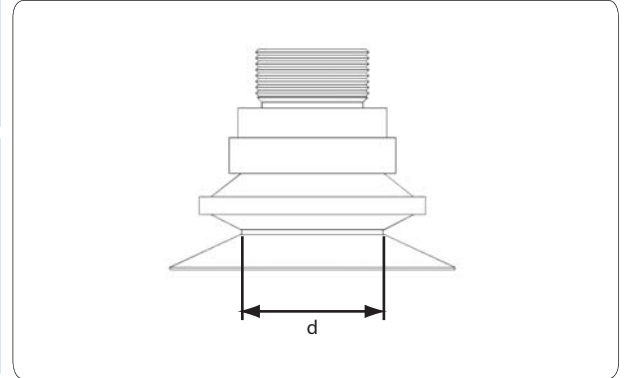
Horizontal pick up :

$$d = 1.12 \times \sqrt{\frac{m \times S}{P_u \times n}}$$

Vertical pick up :

$$d = 1.12 \times \sqrt{\frac{m \times S}{P_u \times n \times \mu}}$$

d = Suction pad diameter in cm
m = Mass of workpiece in kg
P_u = Vacuum in bar
n = Number of suction pads
μ = Friction coefficient
S = Safety factor



Vacuum Knowledge

Calculation example for horizontal pick up :

$$d = 1.12 \times \sqrt{\frac{50 \text{ kg} \times 2}{0.4 \text{ bar} \times 4}}$$

$$d = 8.85 \text{ cm}$$

Metal sheet : m = 50 kg
Vacuum : P_u = -0.4 bar
Number of suction pads : n = 4
Friction coefficient : μ = 0.5
Safety factor : S = 2

Calculation example for vertical pick up :

$$d = 1.12 \times \sqrt{\frac{50 \text{ kg} \times 2}{0.4 \text{ bar} \times 4 \times 0.5}}$$

$$d = 12.5 \text{ cm}$$

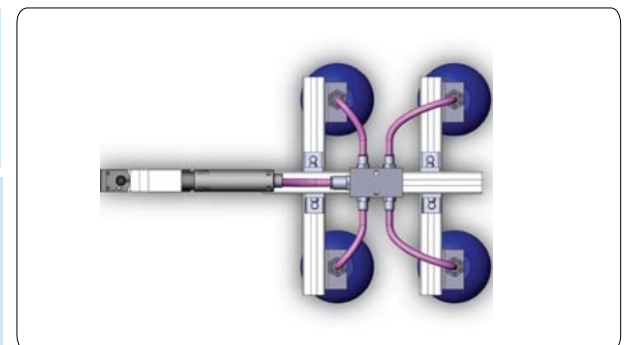
Metal sheet : m = 50 kg
Vacuum : P_u = -0.4 bar
Number of suction pads : n = 4
Friction coefficient : μ = 0.5
Safety factor : S = 2

Diameter of vacuum hose

Diameter of distributor hose (mm) :

$$d = \frac{D}{\sqrt{n}}$$

D = Diameter of supply hose from vacuum generator (mm)
d = diameter of distributor hose (mm)
n = number of distributor hose
A = area of hose (mm²)



Example 1 : How to calculate hose for distributor branch with main ID.
D = 10 mm , number of hose n = 4

$$d = \frac{10}{\sqrt{4}}$$

$$d = 5 \text{ mm}$$

intenal diameter for distributor hose = 5 mm

Example 2 : How to calculate hose ID main supply
number of hose n = 4 hose, ID for distributor d= 5 mm

$$A_d = \frac{\pi d^2}{4} \times n = \frac{\pi 5^2}{4} \times 4 = 78.56 \text{ mm}^2$$

$$A_d = \frac{\pi D^2}{4}$$


$$D = \sqrt{\frac{78.56 \times 4}{\pi}} = 10 \text{ mm}$$

intenal diameter for main supply hose = 10 mm



5 Series Flexy Gripper Flat

1 - 1



10 Series Flexy Flat

2 - 1



15 Series Flexy T - Yellow 1.5 Bellows

3 - 1



15 Series Flexy Dual Shore 1.5 Bellows

4 - 1



15P Series Flexy Dual Shore 1.5 Bellows Large Lips

5 - 1



20 Series Flexy Traction 1.5 Bellows

6 - 1



25 Series Flexy Green Lines 2.5 Bellows

7 - 1



25 Series Flexy Dual Shore 2.5 Bellows

8 - 1



25T Series Flexy Dual Shore 2.5 Bellows Thin Lips

9 - 1



25P Series Flexy Dual Shore 2.5 Bellows Large Lips

10 - 1



25BC Series Flexy Bag Cups 2.5 Bellows

11 - 1



30 Series Flexy Friction Flat

12 - 1



VF33 Flexy Paper Cups

13 - 1



OV Series Flexy Oval Cups

14 - 1



TPU Series

15 - 1



Fittings M5 to G3/8"

16 - 1



Level compensator stroke 20 mm to 75 mm

17 - 1



Vacuum generator nozzle 0.9 mm

18 - 1



Vacuum generator nozzle 1 mm

19 - 1



Vacuum generator nozzle 2.0 mm


20 - 1

5 Series Flexy Gripper Cups – Flat



Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Dark Blue/ Yellow	5°–50°C	40°, 60° Shore A















5 Series - Flexy Gripper Cups

- Our 5 Series “**Flexy Gripper**” you will find in the sizes from Ø 20 mm to Ø 120 mm .
- Normally our polyurethane vacuum cups will last 3-4 times longer than the cups made of rubber or other vulcanized materials. This means less “down time” but more “turn over” with increased productivity.
- Key characteristics are good resilience or flexibility, high tensile strength with high wear and tear resistance. Comparing to other famous brand names, our product quality is comparable or even better
- The 5 Series cups are specially designed to cope with both flat and a bit curved surfaces, particularly useful in the automotive and stamping industry. The internal cleats provide a good grip and the strengthened lip prolong the life of the cup considerably.



5 Series - Flexy Gripper Cups

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm	
	05020-01	Flexy 5-20	40	T - Yellow	25020-20 (G1/8" - M)	50		
	05020-02		60	T - Blue				
	05030-01	Flexy 5-30	40	T - Yellow	25020-21 (G1/8" - F)			
	05030-02		60	T - Blue				
	05040-01	Flexy 5-40	40	T - Yellow	25040-20 (G1/4" - M)		30	
	05040-02		60	T - Blue	25040-21 (G1/4" - F)			
	05060-01	Flexy 5-60	40	T - Yellow	G3/8" - M	20		
	05060-02				G3/8" - F			
	05060-05				G3/8" - M - 1/8" NPSF - F			
	05060-03				G3/8" - M			
	05060-04				G3/8" - F			
	05080-01	Flexy 5-80	40	T - Yellow	G3/8" - M	16		
	05080-02				G3/8" - F			
	05080-05				G3/8" - M - 1/8" NPSF - F			
	05080-03				G3/8" - M			
	05080-04				G3/8" - F			
	05100-01	Flexy 5-100	40	T - Yellow	G3/8" - M	10		
	05100-02				G3/8" - F			
	05100-03				G3/8" - M			
	05100-04				G3/8" - F			
	05120-01	Flexy 5-120	40	T - Yellow	G3/8" - M	8		
	05120-02				G3/8" - F			
	05120-03				G3/8" - M			
	05120-04				G3/8" - F			

Please notice sizes Ø20 to Ø40 are without fittings, cup Ø60 to Ø120 will come with molded insert.
Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvaccuums.com

10 Series Flexy Flat Cups




Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Dark Blue / Blue, Yellow	5°– 50°C	40° / 60° Shore


















Flexy Flat Cups

- Our 10 Series you will find in the sizes from Ø 20 mm to Ø 150 mm, , standard hardness 40 shore A and 60 shore A. Size Ø 60 and Ø 150 standard hardness 40 shore..
- Normally our polyurethane vacuum cups will last 3-4 times longer than the cups made of rubber or other vulcanized materials. This means less "down time" but more "turn over" with increased productivity.
- The 10 series cups are specially designed to cope with flat surfaces, particularly useful in Cardboard, packaging materials , plastic sheets etc. Plastic Sheets, Metal Sheets.



Flexy Flat Cups

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm		
	10020-01	Flexy 10-20	40	T - Yellow	25020-20 (G1/8" - M)	50			
	10020-02		60	T - Blue					
	10030-01	Flexy 10-30	40	T - Yellow			25020-21 (G1/8" - F)		
	10030-02		60	T - Blue					
	10040-01	Flexy 10-40	40	T - Yellow			25040-20 (G1/4" - M)	30	
	10040-02		60	T - Blue			25040-21 (G1/4" - F) 25040-22 (G1/8" - M) 25040-23 (G1/8" - F)		
	10060-01	Flexy 10-60	40	T - Yellow	G3/8" - M	20			
	10060-02			T - Yellow	G3/8" - F				
	10060-03		30/60	L/D - Blue	G3/8" - M				
	10060-04			L/D - Blue	G3/8" - F				
	10060-05		40	T - Yellow	G1/4" - M				
	10060-06		T - Yellow	G1/4" - F					
	10060-07		30/60	L/D - Blue	G1/4" - M				
	10060-08			L/D - Blue	G1/4" - F				
	10060-15		40	T - Yellow	G1/8" - F				
	10080-01	Flexy 10-80	40	T - Yellow	G3/8" - M	16			
	10080-02			T - Yellow	G3/8" - F				
	10080-03		30/60	L/D - Blue	G3/8" - M				
	10080-04			L/D - Blue	G3/8" - F				
	10080-05		40	T - Yellow	G1/4" - M				
	10080-06		T - Yellow	G1/4" - F					
	10080-07		30/60	L/D - Blue	G1/4" - M				
	10080-08			L/D - Blue	G1/4" - F				
	10080-09		60	T - Blue	G3/8" - M				
	10080-10				G3/8" - F				

Please notice sizes Ø 20 to Ø 40 are without fittings, cup Ø 60 to Ø 150 will come with molded insert.
Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvacuumcups.com

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm
	10100-01	Flexy 10-100	40	T - Yellow	G3/8" - M	16	
	10100-02				G3/8" - F		
	10100-03		30/60	L/D - Blue	G3/8" - M		
	10100-04				G3/8" - F		
	10100-05		40	T - Yellow	G1/4" - M		
	10100-06				G1/4" - F		
	10100-07		30/60	L/D - Blue	G1/4" - M		
	10100-08				G1/4" - F		
	10100-09		60	T - Blue	G3/8" - M		
	10100-10				G3/8" - F		
	10150-01	Flexy 10-150	40	T - Yellow	G3/8" - M	16	
	10150-02				G3/8" - F		
	10150-03		30/60	L/D - Blue	G3/8" - M		
	10150-04				G3/8" - F		
	10150-05		40	T - Yellow	G1/4" - M		
	10150-06				G1/4" - F		
	10150-07		30/60	L/D - Blue	G1/4" - M		
	10150-08				G1/4" - F		
	10150-09		60	T - Blue	G3/8" - M		
	10150-10				G3/8" - F		

remark : red color is not available now

Please notice sizes Ø 20 to Ø 40 are without fittings, cup Ø 60 to Ø 150 will come with molded insert. Cups will be delivered in min. quantity as per pcs/box
 For more information and dimensions please contact sales@flexyvacuumcups.com

10 Series

Flexy Cups with Single Shore – 1.5 Bellows T - Yellow Line



15 Series

Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Yellow	5°– 50°C	40° Shore A



















15 Series - Flexy Cups 1.5 Bellow T- Yellow Line

- Our 15 Series “Flexy T - Yellow Line” you will find in the sizes from Ø 10 mm to Ø 70 mm .
- Normally our polyurethane vacuum cups will last 3-4 times longer than the cups made of rubber or other vulcanized materials. This means less “down time” but more “turn over” with increased productivity.
- Key characteristics are good resilience or flexibility, high tensile strength with high wear and tear resistance. Comparing to other famous brand names, our product quality is comparable or even better
- The 1.5 T-yellow families is good in areas with slightly convex surfaces, compensates up to a certain degree for height differences and separation of thin materials.



15 Series - Flexy Cups 1.5 Bellow T - Yellow Line

Order Information


Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm	
	15010-08	Flexy 15-10	40	T - Yellow	15015-20 (M5,O-Ring)	25		
	15015-08	Flexy 15-15						
	15020-08	Flexy 15-20			25020-20 (G1/8" - M) 25020-21 (G1/8" - F)	50	15-20	
	15030-08	Flexy 15-30			25040-20 (G1/4" - M) 25040-21 (G1/4" - F)			30
	15040-08	Flexy 15-40						
	15050-08	Flexy 15-50			25050-20 (G3/8" - M) 25050-21 (G3/8" - F) 25050-22 (G1/4" - M) 25050-23 (G1/4" - F)	18	15-50	
	15060-08	Flexy 15-60						
	15070-18	Flexy 15-70			G3/8" - M	8	15-70	
	15070-19				3/8" NPF5 - F			
	15070-20				G3/8" - F			

15 Series

Please notice sizes Ø10 to Ø50 are without fittings, 15-70 will come with molded insert.
Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvaccumcups.com

Flexy Dual Shore – 1.5 Bellows

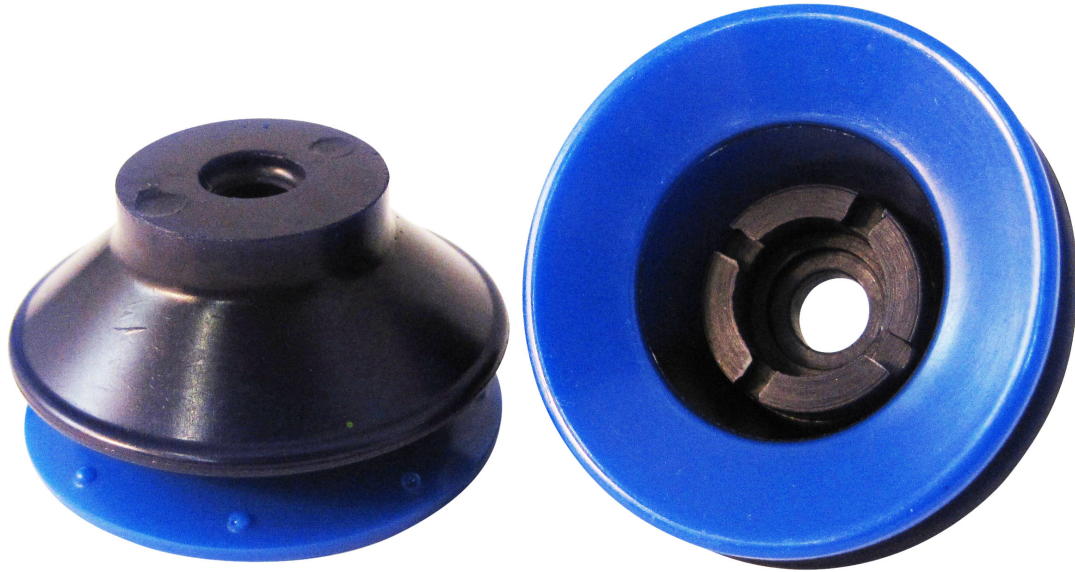Standard Vacuum Cups



COMBiFlex


Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Dark Blue / Blue	5°– 50°C	30° / 60°Shore



1.5 Bellow Standard Cups

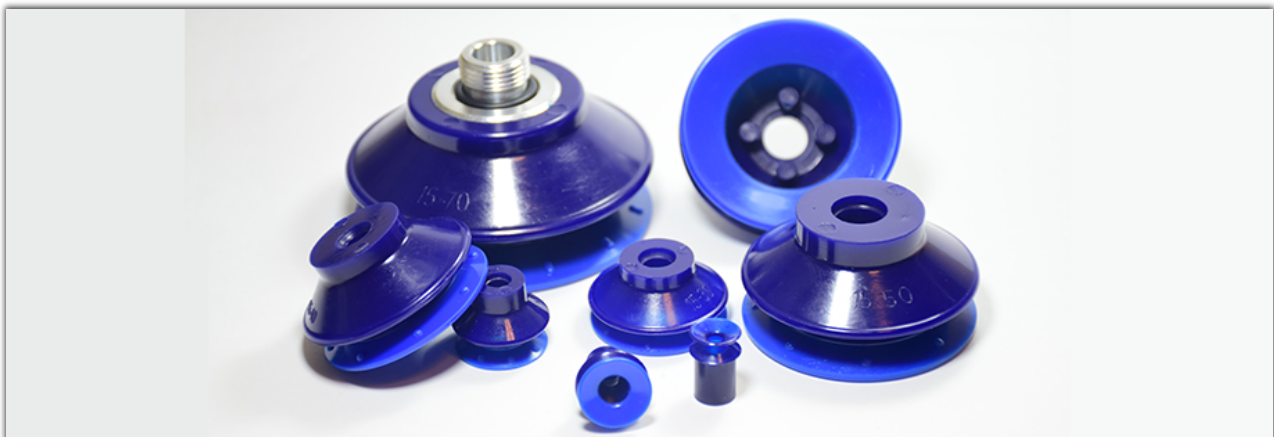- Our 1.5 family you will find in the sizes from Ø 10 mm to Ø 70 mm .
- Our CombiFlex cups you will find in standard hardness 30/60 shore A and 60 shore A. The two hardness cup 30/60 shore has a bellow in 60 shore and a lip in 30 shore, which makes the cup stable and durable with excellent sealing properties.
- Our "CombiFlex " material is developed to meet all the characteristics that is required for a high performance vacuum cup. Normally our polyurethane vacuum cups will last 3-4 times longer than the cups made of rubber or other vulcanized or polymerized materials. This means less "down time" but more "turn over" with increased productivity. Their key characteristics are good resilience or flexibility, high tensile strength with high wear and tear resistance. Comparing to other famous brand names, our product quality is comparable or even better. In general we are also able to keep a much more competitive price.
- The 1.5 family is good in areas with slightly convex surfaces, compensates up to a certain degree for height differences and separation of thin materials.










Flexy Standard Cups 1.5 Bellows Family

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm
	15010-06	Flexy 15-10	60	T - Blue			
	15011-01	Flexy 15-11	30/60	L/D - Blue	15015-20 (M5,O-Ring)	25	
	15011-06		60	D - Blue			
	15015-01	Flexy 15-15	30/60	L/D - Blue			
	15015-06		60	D - Blue			
	15020-01	Flexy 15-20	30/60	L/D - Blue	25020-20 (G1/8" - M)	50	
	15020-06		60	D - Blue			
	15025-01	Flexy 15-25	30/60	L/D - Blue	25020-21 (G1/8" - F)	50	
	15025-06		60	D - Blue			
	15030-01	Flexy 15-30	30/60	L/D - Blue	25040-20 (G1/4" - M)	30	
	15030-06		60	D - Blue			
	15035-01	Flexy 15-35	30/60	L/D - Blue	25040-21 (G1/4" - F)	30	
	15035-06		60	D - Blue	25040-22 (G1/8" - M) 25040-23 (G1/8" - F)		
	15040-01	Flexy 15-40	30/60	L/D - Blue			
	15040-06		60	D - Blue			
	15050-01	Flexy 15-50	30/60	L/D - Blue	25050-20 (G3/8" - M) 25050-21 (G3/8" - F)	18	
	15050-06		60	D - Blue			
	15060-01	Flexy 15-60	30/60	L/D - Blue	25050-22 (G1/4" - M) 25050-23 (G1/4" - F)	18	
	15060-06		60	D - Blue			

Order Information

Standard Vacuum Cups

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm		
	15070-01	Flexy 15-70	30/60	L/D - Blue	G3/8" - M	8	 <p>15 - 70 F</p>		
	15070-02				3/8" NPFS - F				
	15070-03				G3/8" - F				
	15070-04				G1/4" - M				
	15070-11		60	D - Blue	G3/8" - M			 <p>15 - 70 M</p>	
	15070-12				3/8" NPFS - F				
	15070-13				G3/8" - F				
	15085-01	Flexy 15-85	30/60	L/D - Blue	G3/8" - M	8	 <p>15 - 85 F</p>		
	15085-02				3/8" NPFS - F				
	15085-03				G3/8" - F				
	15085-11				G3/8" - M			60	D - Blue
	15085-12		3/8" NPFS - F						
	15085-13		G3/8" - F						
			15100-01	Flexy 15-100	30/60			L/D - Blue	G3/8" - M
15100-02		3/8" NPFS - F							
15100-03		G3/8" - F							
15100-11		G3/8" - M	60			D - Blue	G3/8" - M		 <p>15 - 100 F</p>
15100-12		3/8" NPFS - F							
15100-13		G3/8" - F							

Please notice sizes 10 to 60 are without fittings, cup 15-70,85,100 will come with molded insert. Height for 15-70, 85,100 include insert. Cups will be delivered in min. quantity as per pcs/box
 For more information and dimensions please contact sales@flexyvacuumcups.com

Flexy Cups with Dual Shore – 1.5 Bellows Large Lips

NEW!

15P Series



COMBiFlex

Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Yellow / Blue	5°– 50°C	30° / 55° Shore A



15P Series - Flexy Cups 1.5 Bellow - New Combi Flex

- The two hardness cup 30/55 shore has a bellow in 55 shore and a lip in 30 shore, which makes the cup stable and durable with excellent sealing properties.
- "CombiFlex " material is developed to meet all the characteristics that is required for a high performance vacuum cup.
- Normally our polyurethane vacuum cups will last 3-4 times longer than the cups made of rubber or other vulcanized or polymerized materials. This means less "down time" but more "turn over" with increased productivity.
- Flexible sealing surface with a lighter blue 30° shore.
- Good resilience or flexibility, high tensile strength with high wear and tear resistance.
- Able to keep a much more competitive price.



15P Series - Flexy Cups 1.5 Bellow - T Green - Combi Flex

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm
	15020-01P	Flexy 15-20P	30/55	L - Blue / T - Yellow	15015-20 (M5, O-Ring)	50	
	15020-06P		55	T - Green			
	15025-01P	Flexy 15-25P	30/55	L - Blue / T - Yellow	25020-20 (G1/8" - M) 25020-21 (G1/8" - F)	50	
	15025-06P		55	T - Green			
	15035-01P	Flexy 15-35P	30/55	L - Blue / T - Yellow	25040-20 (G1/4" - M) 25040-21 (G1/4" - F)	30	
	15035-06P		55	T - Green			
	15045-01P	Flexy 15-45P	30/55	L - Blue / T - Yellow	25040-22 (G1/8" - M) 25040-23 (G1/8" - F)	18	
	15045-06P		55	T - Green			
	15055-01P	Flexy 15-55P	30/55	L - Blue / T - Yellow	25050-20 (G3/8" - M) 25050-21 (G3/8" - F) 25050-22 (G1/4" - M) 25050-23 (G1/4" - F)	18	
	15055-06P		55	T - Green			

Please notice sizes Ø20 to Ø55 are without fittings
Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvacuumcups.com

Flexy Traction™ CombiFlex with Single and Dual Shore – 1.5 Bellows



COMBiFlex

Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Dark Blue/ Blue	5°– 50°C	30°/60° Shore A



20 Series - Flexy Traction Cups

- Our 20 Series “Flexy Traction” you will find in the sizes from Ø 40 mm to Ø 100 mm .
- Normally our polyurethane vacuum cups will last 3-4 times longer than the cups made of rubber or other vulcanized materials. This means less “down time” but more “turn over” with increased productivity.
- Key characteristics are good resilience or flexibility, high tensile strength with high wear and tear resistance. Comparing to other famous brand names, our product quality is comparable or even better
- The 20 Series cups are specially designed to cope with both flat and a bit curved surfaces, suitable applications are cardboards etc. The 60 shore is also useful in the stamping industry. The cleats under the lip also provide a good grip.



20 Series - Flexy Traction Cups

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm
	20030-01	Flexy 20-30	30/60	L/D - Blue	G3/8" - M - 1/8" NPSF - F	18	
	20030-02				G3/8" - F		
	20030-03				3/8" NPSF - F		
	20030-04				G3/8" - M - 1/8" NPSF - F		
	20030-05				G3/8" - F		
	20030-06				3/8" NPSF - F		
	20030-07		30/60	L/D - Blue	G1/4" - M		
	20030-08		G1/4" - F				
	20030-09		60	D - Blue	G1/4" - M		
	20030-10		G1/4" - F				
	20040-01	Flexy 20-40	30/60	L/D - Blue	G3/8" - M - 1/8" NPSF - F	10	
	20040-02				G3/8" - F		
	20040-03				3/8" NPSF - F		
	20040-04				G3/8" - M - 1/8" NPSF - F		
	20040-05				G3/8" - F		
	20040-06				3/8" NPSF - F		
	20040-07		30/60	L/D - Blue	G1/4" - M		
	20040-08		G1/4" - F				
	20040-09		60	D - Blue	G1/4" - M		
	20040-10		G1/4" - F				

20 Series

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm	
	20080-01	Flexy 20-80	30/60	L/D - Blue	G3/8" - M - 1/8" NPSF - F	8	<p>20-80 F</p>	
	20080-02				G3/8" - F			
	20080-03				3/8" NPSF - F			
	20080-04		60	D - Blue	G3/8" - M - 1/8" NPSF - F		<p>20-80 M</p>	
	20080-05				G3/8" - F			
	20080-06				3/8" NPSF - F			
	20080-07		30/60	L/D - Blue	60		D - Blue	<p>20-80 M</p>
	20080-09		G1/4" - M					
			20100-01	Flexy 20-100	30/60		L/D - Blue	G3/8" - M - 1/8" NPSF - F
20100-02		G3/8" - F						
20100-03		3/8" NPSF - F						
20100-04		60	D - Blue		G3/8" - M - 1/8" NPSF - F	<p>20-100 M</p>		
20100-05					G3/8" - F			
20100-06					3/8" NPSF - F			
20100-07		30/60	L/D - Blue		60	D - Blue	<p>20-100 M</p>	
20100-09		G1/4" - M						

Please notice sizes Ø30 to Ø100 will come with molded insert.
 Cups will be delivered in min. quantity as per pcs/box
 For more information and dimensions please contact sales@flexyvacuumcups.com

Flexy Cups with Single Shore – 2.5 Bellows Green Line



25 Series Green Line

Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Green	5°– 50°C	50° Shore



2.5 Bellow Green Line

- Our 2.5 family Green line you will find in the sizes from Ø 15 mm to Ø 70 mm .
- Hardness 50 shore and the compound is same as the other Flexy cups.
- The compound is very durable with excellent sealing properties. 2.5 bellow cups probably one of the most sold types all over the world for general applications.
- If no special requirements as high temperature resistance etc. , those cups normally can be very good replacement for silicone, neoprene and other various compounds.
- The 2.5 family is good for use on specially curved and uneven surfaces. The double bellows suction cup is very good at compensating for a degree of difference in level and curvatures of a work piece.



Flexy Cups with Single Shore 2.5 Bellows Family Green Line

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm	
	25015-30	Flexy 25-15	50	Green	15015-20 (M5,O-Ring)	25	<p>25-15</p>	
	25020-30	Flexy 25-20			25020-20 (G1/8" - M) 25020-21 (G1/8" - F)	50	<p>25-20</p>	
25025-30	Flexy 25-25	<p>25-25</p>						
25030-30	Flexy 25-30	<p>25-30</p>						
	25035-30	Flexy 25-35			25040-20 (G1/4" - M) 25040-21 (G1/4" - F)	30	<p>25-35</p>	
	25040-30	Flexy 25-40					<p>25-40</p>	
	25050-30	Flexy 25-50			25050-20 (G3/8" - M) 25050-21 (G3/8" - F) 25050-22 (G1/4" - M) 25050-23 (G1/4" - F)	18	<p>25-50</p>	
	25052-30	Flexy 25-52					<p>25-52</p>	
	25070-30	Flexy 25-70			G3/8" - M	3/8" NPFS - F	10	<p>25-70 F</p>
	25070-31							
	25070-32		G1/4" - M	<p>25-70 M</p>				
	25070-33							G1/4" - M

25 Series Green Line

Please notice sizes 15 to 50 are without fittings, cup 25-70 will come with molded insert. Height for 25-70 include insert. Cups will be delivered in min. quantity as per pcs/box
 For more information and dimensions please contact sales@flexyvacuumcups.com

Flexy Dual Shore – 2.5 Bellows



Standard Vacuum Cups

COMBiFlex

Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Dark Blue / Blue	5°– 50°C	30° / 60°Shore



2.5 Bellow Standard Cups

- Our 2.5 family you will find in the sizes from Ø 15 mm to Ø 70 mm .
- Our CombiFlex cups you will find in standard hardness 30/60 shore A and 60 shore A. The two hardness cup 30/60 shore has a bellow in 60 shore and a lip in 30 shore, which makes the cup stable and durable with excellent sealing properties.
- Our "CombiFlex " material is developed to meet all the characteristics that is required for a high performance vacuum cup. Normally our polyurethane vacuum cups will last 3-4 times longer than the cups made of rubber or other vulcanized or polymerized materials. This means less "down time" but more "turn over" with increased productivity. Their key characteristics are good resilience or flexibility, high tensile strength with high wear and tear resistance. Comparing to other famous brand names, our product quality is comparable or even better. In general we are also able to keep a much more competitive price.
- The 2.5 family is good for use on specially curved and uneven surfaces. The double bellows suction cup is very good at compensating for a degree of difference in level and curvatures of a workpiece.



Flexy Standard Cups 2.5 Bellows Family

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm		
	25010-01	Flexy 25-10	30/60	L/D - Blue	15015-20 (M5,O-Ring)	25			
	25010-06		60	D - Blue			25 - 10		
	25015-01	Flexy 25-15	30/60	L/D - Blue					
	25015-06		60	D - Blue			25 - 15		
	25020-01	Flexy 25-20	30/60	L/D - Blue	25020-20 (G1/8" - M)	50			
	25020-06		60	D - Blue			25 - 20		
	25025-01	Flexy 25-25	30/60	L/D - Blue			25020-21 (G1/8" - F)	50	
	25025-06		60	D - Blue					25 - 25
	25030-01	Flexy 25-30	30/60	L/D - Blue			25030-01	50	
	25030-06		60	D - Blue					25 - 30
	25035-01	Flexy 25-35	30/60	L/D - Blue	25040-20 (G1/4" - M)	30			
	25035-06		60	D - Blue			25 - 35		
	25040-01	Flexy 25-40	30/60	L/D - Blue	25040-21 (G1/4" - F)	30			
	25040-06		60	D - Blue			25 - 40		
	25050-01	Flexy 25-50	30/60	L/D - Blue	25050-20 (G3/8" - M)	18			
	25050-06		60	D - Blue			25 - 50		
	25052-01	Flexy 25-52	30/60	L/D - Blue	25050-21 (G3/8" - F)	18			
	25052-06		60	D - Blue			25 - 52		
	25060-01	Flexy 25-60	30/60	L/D - Blue	25050-22 (G1/4" - M)	18			
	25060-06		60	D - Blue			25 - 60		

Standard Vacuum Cups

Please notice sizes 10 to 60 are without fittings, cup 25-70 will come with molded insert. Height for 25-70 include insert. Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvacuumcups.com


Order Information

Standard Vacuum Cups


Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm		
	25070-01	Flexy 25-70	30/60	L/D - Blue	G3/8" - M	10			
	25070-02				3/8" NPFS - F				
	25070-03				G3/8" - F				
	25070-35				G3/8" - M - 1/8" NPFS - F				
	25070-40		G1/4" - M	60	D - Blue		G3/8" - M		
	25070-11		3/8" NPFS - F						
	25070-12		G3/8" - F						
	25070-13		G3/8" - F						
	25075-01	Flexy 25-75	30/60				L/D - Blue		G3/8" - M
	25075-02			3/8" NPFS - F					
	25075-03			G3/8" - F					
	25075-35		G3/8" - M - 1/8" NPFS - F	60	D - Blue		G3/8" - M		
	25075-11		3/8" NPFS - F						
25075-12	G3/8" - F								
25075-13	G3/8" - F								
	25100-01	Flexy 25-100	30/60	L/D - Blue	G3/8" - M	10			
	25100-02				3/8" NPFS - F				
	25100-03				G3/8" - F				
	25100-35		G3/8" - M - 1/8" NPFS - F	60	D - Blue		G3/8" - M		
	25100-11		3/8" NPFS - F						
	25100-12		G3/8" - F						
	25100-13		G3/8" - F						

Please notice sizes 10 to 60 are without fittings, cup 25-70,75,100 will come with molded insert. Height for 25-70, 75,100 include insert. Cups will be delivered in min. quantity as per pcs/box
 For more information and dimensions please contact sales@flexyvacuumcups.com

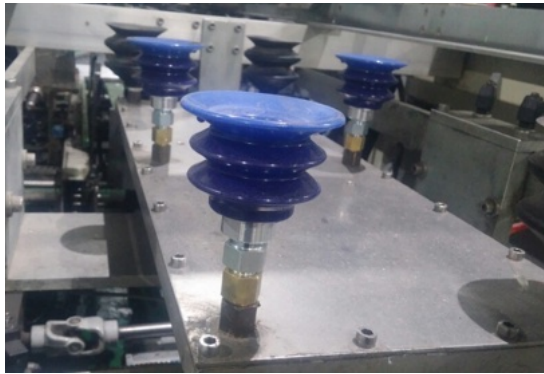Application Picture



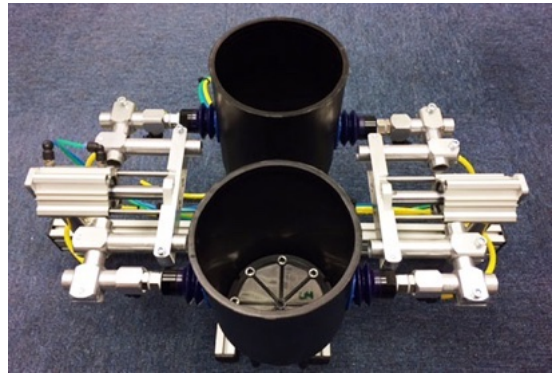Flexy 25 series dual shore for packaging industry



Flexy 25 series dual shore for plastic mold industry

Flexy Dual Shore – 2.5 Bellows - Thin Lips



Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Dark Blue/ Blue	5°– 50°C	30° / 55°Shore









2.5 Bellow Vacuum Cups with Thin Lip

- Our 2.5T family you will find in the sizes from Ø 30 mm to Ø 70 mm .
- Our CombiFlex cups you will find in standard hardness 30/55 shore A and 55 shore A. The two hardness cup 30/55 shore has a bellow in 55 shore and a lip in 30 shore, which makes the cup stable and durable with excellent sealing properties.
- Our "CombiFlex " material is developed to meet all the characteristics that is required for a high performance vacuum cup. Normally our polyurethane vacuum cups will last 3-4 times longer than the cups made of rubber or other vulcanized or polymerized materials. This means less "down time" but more "turn over" with increased productivity. Their key characteristics are good resilience or flexibility, high tensile strength with high wear and tear resistance. Comparing to other famous brand names, our product quality is comparable or even better. In general we are also able to keep a much more competitive price.
- The 2.5 family is good for use on specially curved and uneven surfaces. The double bellows suction cup is very good at compensating for a degree of difference in level and curvatures of a work piece.



Flexy Vacm Cups 2.5 Bellows Family

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm
	25030-01T	Flexy 25-30T	30/55	L/T - Blue	25020-20 (G1/8" - M)	50	 25-30T
	25030-06T		55	T - Blue	25020-21 (G1/8" - F)		
	25040-01T	Flexy 25-40T	30/55	L/T - Blue	25040-20 (G1/4" - M)	30	 25-40T
	25040-06T		55	T - Blue	25040-21 (G1/4" - F)		
	25050-01T	Flexy 25-50T	30/55	L/T - Blue	25050-20 (G3/8" - M)	18	 25-50T
	25050-06T		55	T - Blue	25050-21 (G3/8" - F) 25050-22 (G1/4" - M) 25050-23 (G1/4" - F)		
	25070-01T	Flexy 25-70T	30/55	L/T - Blue	G3/8 - M	10	 25-70 F
	25070-02T				3/8 NPSF - F		
	25070-03T				G3/8 - F		
	25070-11T		55	T - Blue	G3/8 - M		
	25070-12T				3/8 NPSF - F		
	25070-13T				G3/8 - F		
							 25-70 M

Please notice sizes 30 to 50 are without fittings, cup 25-70 will come with molded insert. Height for 25-70 include insert. Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvacuumcups.com

Flexy Picker™ CombiFlex Dual Shore – 2.5 Bellows - Large Lips

NEW!

25 Series



COMBIFlex

Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Yellow / Blue	5°-50°C	30° / 55°Shore

Order nipples separately.



New Combi Flex Vacuum Cups

- The two hardness cup 30/55 shore has a bellows in 55 shore and a lip in 30 shore, which makes the cup stable and durable with excellent sealing properties.
- "CombiFlex" material is developed to meet all the characteristics that is required for a high performance vacuum cup.
- Normally our polyurethane vacuum cups will last 3-4 times longer than the cups made of rubber or other vulcanized or polymerized materials. This means less "down time" but more "turn over" with increased productivity.
- Flexible sealing surface with a lighter blue 30° shore.
- Good resilience or flexibility, high tensile strength with high wear and tear resistance.
- Able to keep a much more competitive price.








Pouch or bag packaging application



Flexy Picker Cups 2.5 Bellows Family

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm
	25025-01P	Flexy 25-25P	30/55	L- Blue/ T - Yellow	25020-20 (G1/8" - M)	50	 25-25P
	25025-06P		55	T - Green			25-25P
	25035-01P	Flexy 25-35P	30/55	L- Blue/ T - Yellow	25020-21 (G1/8" - F)	30	 25-35P
	25035-06P		55	T - Green			25-35P
	25045-01P	Flexy 25-45P	30/55	L- Blue/ T - Yellow	25040-20 (G1/4" - M)	18	 25-45P
	25045-06P		55	T - Green	25040-21 (G1/4" - F)		25-45P
	25055-01P	Flexy 25-55P	30/55	L- Blue/ T - Yellow	25050-20 (G3/8" - M)	15	 25-55P
	25055-06P		55	T - Green	25050-21 (G3/8" - F)		

Please notice sizes 25 to 55 are without fittings.
Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvacuumcups.com

Flexy Bag Cup™ CombiFlex Dual Shore – 2.5 Bellows - Large Lips with Cleat

25BC Series



COMBiFlex

Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Light Blue / Blue	5°-50°C	30° / 55°Shore

Order nipples separately.



New Combi Flex Vacuum Cups

- The two hardness cup 30/55 shore has a bellow in 55 shore and a lip in 30 shore, which makes the cup stable and durable with excellent sealing properties.
- "CombiFlex" material is developed to meet all the characteristics that is required for a high performance vacuum cup.
- Normally our polyurethane vacuum cups will last 3-4 times longer than the cups made of rubber or other vulcanized or polymerized materials. This means less "down time" but more "turn over" with increased productivity.
- Flexible sealing surface with a lighter blue 30° shore.
- Good resilience or flexibility, high tensile strength with high wear and tear resistance.
- Able to keep a much more competitive price.



Pouch or bag packaging application



Flexy Bag Cups 2.5 Bellows Family

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm
	25025-01BC	Flexy 25-25BC	30/55	L- Blue/ T - Blue	25020-20 (G1/8" - M)	30	
	25025-06BC		55	T - Blue	25020-21 (G1/8" - F)		
	25035-01BC	Flexy 25-35BC	30/55	L- Blue/ T - Blue	25020-20 (G1/8" - M)	30	
	25035-06BC		55	T - Blue	25020-21 (G1/8" - F)		
	25045-01BC	Flexy 25-45BC	30/55	L- Blue/ T - Blue	25040-20 (G1/4" - M)	18	
	25045-06BC		55	T - Blue	25040-21 (G1/4" - F) 25040-22 (G1/8" - M) 25040-23 (G1/8" - F)		
	25055-01BC	Flexy 25-55BC	30/55	L- Blue/ T - Blue	25050-20 (G3/8" - M)	15	
	25055-06BC		55	T - Blue	25050-21 (G3/8" - F) 25050-22 (G1/4" - M) 25050-23 (G1/4" - F)		

25BC Series

	25035-01FBC	Flexy 25-35FBC	30/55	L- Blue/ T - Blue	25040-20 (G1/4" - M)	30	
	25035-06FBC		60	D - Blue	25040-21 (G1/4" - F) 25040-22 (G1/8" - M) 25040-23 (G1/8" - F)		
	25050-01FBC	Flexy 25-50FBC	30/55	L- Blue/ T - Blue	25050-20 (G3/8" - M) 25050-21 (G3/8" - F) 25050-22 (G1/4" - M) 25050-23 (G1/4" - F)	15	
	25050-06FBC		60	D - Blue			
	25065-01FBC	Flexy 25-65FBC	30/55	L- Blue/ T - Blue	25050-20 (G3/8" - M) 25050-21 (G3/8" - F) 25050-22 (G1/4" - M) 25050-23 (G1/4" - F)	15	
	25065-06FBC		60	D - Blue			

Please notice sizes 25 to 65 are without fittings.
Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvacuumcups.com

Flexy Friction Flat Cups

30 Series



Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Dark Blue/ Yellow	5°– 50°C	55° / 60°Shore



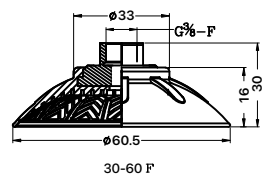
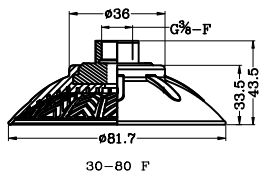
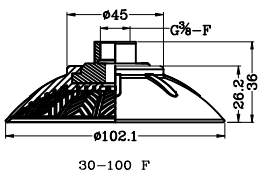
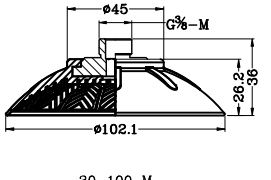
Flexy Friction Cups

- Our 30 family you will find in the sizes Ø 80 - 100 mm .
- Our CombiFlex cups you will find in standard hardness 55/60 shore A and 60 shore A. The two hardness cup 55/60 shore has a bellow in 60 shore and a friction in 55 shore, which makes the cup stable and durable with excellent friction properties.




Flexy Friction Cups

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm
	30060-01	Flexy 30-60	55/60	Yellow/ T - Blue	G3/8" - M	16	
	30060-02				G3/8" - F		
	30060-03		60	T - Blue	G3/8" - M		
	30060-04				G3/8" - F		
	30080-01	Flexy 30-80	55/60	Yellow/ T - Blue	G3/8" - M	16	
	30080-02				G3/8" - F		
	30080-03		60	T - Blue	G3/8" - M		
	30080-04				G3/8" - F		
	30100-01	Flexy 30-100	55/60	Yellow/ T - Blue	G3/8" - M	10	
	30100-02				G3/8" - F		
	30100-03		60	T - Blue	G3/8" - M		
	30100-04				G3/8" - F		

Please notice all size cup will come with molded insert.
include insert. Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvacuumcups.com

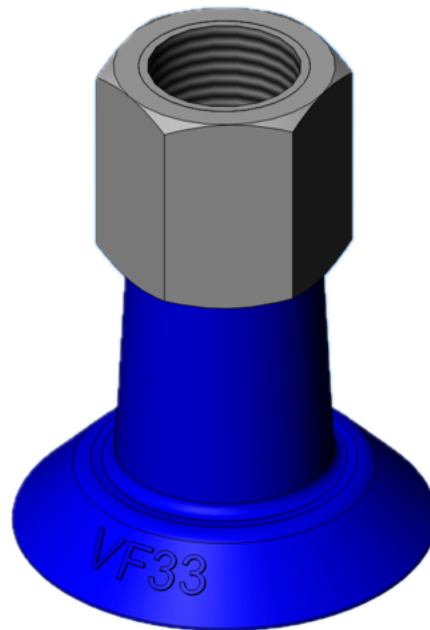Flexy VF Series




Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Green,Blue,Red	5°– 50°C	40°,60° Shore A



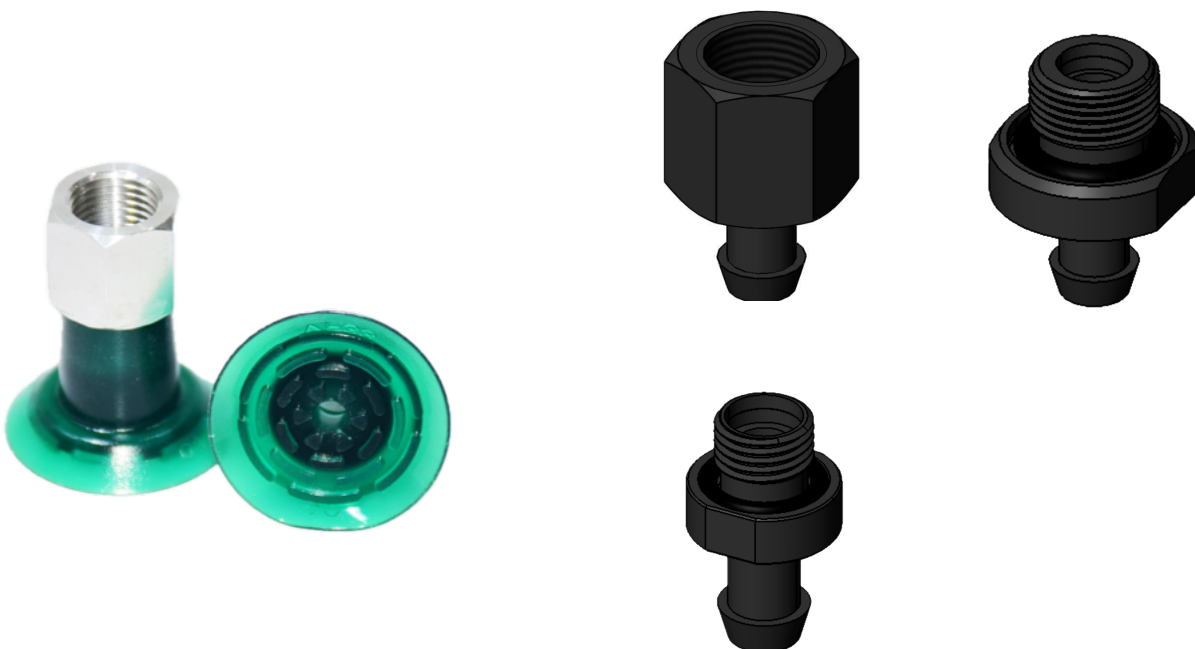
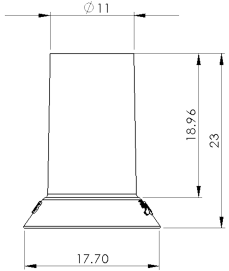













Flexy VF Cups

- Our VF family you will find in the sizes $\varnothing 17$, $\varnothing 25$ and $\varnothing 33$ mm.
- Our VF cups you will find in standard hardness 40 and 60 shore A. The flat cup which makes the cup stable and durable with excellent friction properties and good for thin workpiece.



Flexy VF Cups

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm	
	VF17-01	Flexy VF17	40	T-Green				
	VF17-02		60	D-Blue				
	VF17-03		40	Red				
	VF17-04			T-Orange				
	VF25-01	Flexy VF25	40	T-Green	FVF-G1MO G1/8" - M	30		
	VF25-02		60	D-Blue				FVF-G1F G1/8" - F
	VF25-03		40	Red				FVF-G2MO G1/4" - M
	VF25-04			T-Orange				FVF-G2F G1/4" - F
	VF33-01	Flexy VF33	40	T-Green				
	VF33-02		60	D-Blue				
	VF33-03		40	Red				
	VF33-04			T-Orange				

remark : red color is not available now

Please notice all size cup will come without fitting.
include insert. Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvacuumcups.com

Flexy Oval Cups



COMBiFlex

Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Blue	5°– 50°C	30°/60°,60° Shore A



Flexy Oval Cups





- Our Oval family you will find in the sizes 20x60 and 40x95 mm .
- Our Oval cups you will find in standard hardness 30/60,60 shore A. The 1.5 bellow cup which makes the cup stable and durable with excellent sealing properties and good for narrow workpiece.



Flexy Oval Cups

OV Series

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm
	OV2060-01-G1M	Flexy Oval 20x60	30/60	D-Blue/L-Blue	G1/8" - M	30	
	OV2060-01-G1F				G1/8" - F		
	OV2060-02-G1M		60	D-Blue	G1/8" - M		
	OV2060-02-G1F				G1/8" - F		
	OV4095-01-G3M	Flexy Oval 40x95	30/60	D-Blue/L-Blue	G3/8" - M	15	
	OV4095-01-G3F				G3/8" - F		
	OV4095-02-G3M		60	D-Blue	G3/8" - M		
	OV4095-02-G3F				G3/8" - F		

Please notice all size cup will come with fitting.
include insert. Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvacuumcups.com

Flexy TPU



TPU Series

COMBiFlex

Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
TPU	Light Blue	5°– 50°C	50° Shore A






Flexy TPU Cups

- Our TPU family you will find in the sizes Ø 52 mm .
- Our TPU cups you will find in standard hardness 50 shore A. The 1.5 bellow cup which makes the cup stable and durable with excellent sealing properties and good for universal workpiece.



Flexy TPU Cups

Order Information

Picture	Article No.	Description	Hardness Shore A	Color	Insert / Fitting	Pcs. / Box	Dimension in mm
	15052-TPU	Flexy TPU 15-52	50	L-Blue	25050-20	30	
					25050-21		

TPU Series

Please notice all size cup will come without fitting. include insert. Cups will be delivered in min. quantity as per pcs/box
For more information and dimensions please contact sales@flexyvacuumcups.com

Fittings



Fittings

Fittings Properties

Material	Color	Temp. Range
Aluminum	Black	5°– 80°C





















Nipples

- Our fittings you will find in size M5 to G3/8"
- Our fittings for fit to vacuum cups
- Fittings Black anodized with locking ring and mesh filter



Fittings

Order Information

Picture	Article No.	Description	Use with Cup	Pcs. / Box	Family	Dimension in mm
	15015-20	M5, O-Ring	15-10 15-11 15-15 25-10 25-15	50	F01	
	25020-20	G1/8" - M	5-20 5-30 10-20 10-30 15-20 15-25	50	F02	
	25020-21	G1/8" - F	25-20 25-25 25-30 25-35P			
	25040-20	G1/4" - M	5-40 10-40 15-30 15-35 15-40	30	F03	
	25040-21	G1/4" - F	25-35 25-40 25-45			
	25050-20	G3/8" - M	15-50 15-60 25-50 25-52 25-55 25-60 25-65	36	F04	
	25050-21	G3/8" - F				
	25050-22	G1/4" - M				
	25050-23	G1/4" - F				

For more information and dimensions please contact sales@flexyvacuumcups.com

Order Information

Picture	Article No.	Description	Use with Cup	Pcs. / Box	Family	Dimension in mm
	25040-22	G1/8" - M	5-40 10-40 15-30 15-40 25-35 25-40 25-45	50	F07	
	25040-23	G1/8" - F				
	25050-26	G1/8" - M	15-50 15-60 25-50 25-52 25-55 25-60 25-65	50	F06	
	25050-27	G1/8" - F				
	FVF-G1M	G1/8" - M	VF33	50	F08	
	FVF-G1F	G1/8" - F				
	FVF-G2M	G1/4" - M				
	FVF-G2F	G1/4" - F				

remark : red color is not available now

For more information and dimensions please contact sales@flexyvacuumcups.com

Level Compensator



Level Compensator Properties

Material	Color	Temp. Range
Steel	Silver / Blue	5° - 80°C



Level Compensator

- Our Level Compensator you will find in the stroke from 20 mm to 75 mm .
- Our Level Compensator for handling of workpieces with difference height and prevent easily damaged workpieces.
- Avialable both of internal spring and external spring


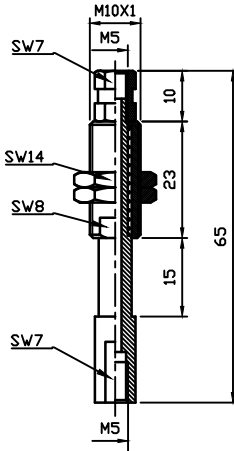
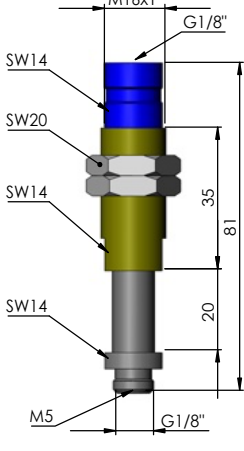

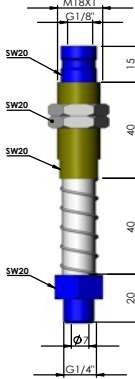
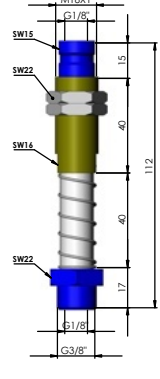


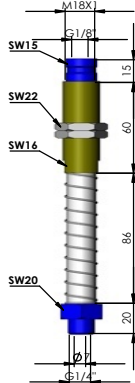
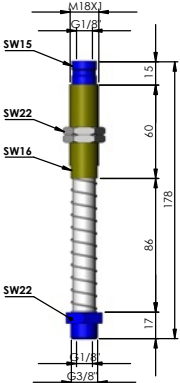

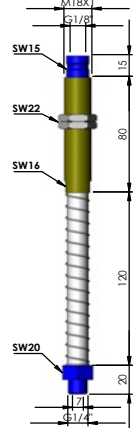
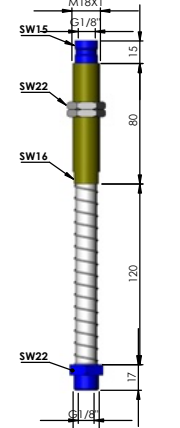


Blue External Level Compensator



Internal Level Compensator

Order Information


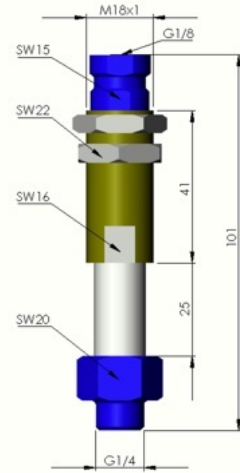
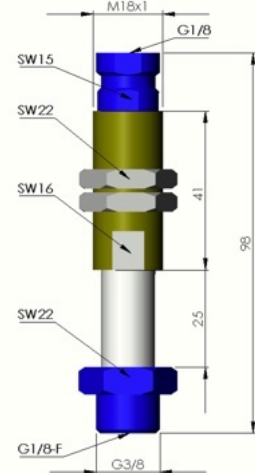

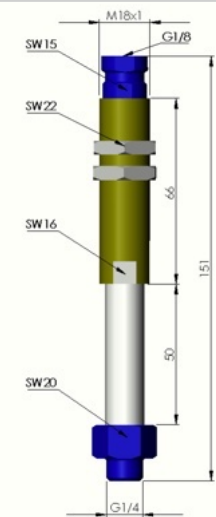
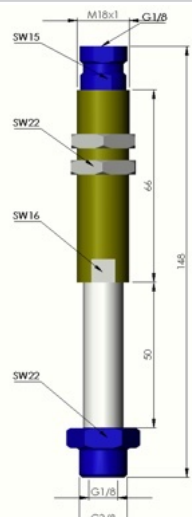
Picture	Article No.	Description	Color	Dimension in mm	
	SLIM515	Level Compensator M5 stroke 15 mm	Blue and Silver		
	SLI1820	Level Compensator G1/8" stroke 20 mm			
	SLE1425	Level Compensator G1/4" stroke 25 mm			
	SLE3825	Level Compensator G3/8" stroke 25 mm			
 	SLE1450	Level Compensator G1/4" stroke 50 mm			
	SLE3850	Level Compensator G3/8" stroke 50 mm			
	SLE1475	Level Compensator G1/4" stroke 75 mm			
	SLE3875	Level Compensator G3/8" stroke 75 mm			

* internal spring on request

For Internal Spring on request

For more information and dimensions please contact sales@flexyvacuumcups.com

Order Information

Picture	Article No.	Description	Color	Dimension in mm
	SLI1425	Level Compensator G1/4" stroke 25 mm	Blue and Silver	
	SLI3825	Level Compensator G3/8" stroke 25 mm		
	SLI1450	Level Compensator G1/4" stroke 50 mm		
	SLI3850	Level Compensator G3/8" stroke 50 mm		

Level Compensator

Vacuum Generator

Vacuum Generator



Vacuum Generator Properties

Material	Color	Temp. Range
Aluminum	Blue	-10° - 80°C



Vacuum Generator

- Our vacuum generator you will find in the nozzle 0.9 mm .
- Our vacuum generator use for generate vacuum by compress air.
- Optimized for all handling application


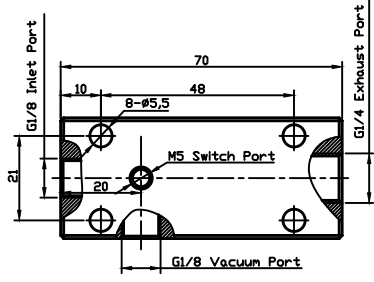

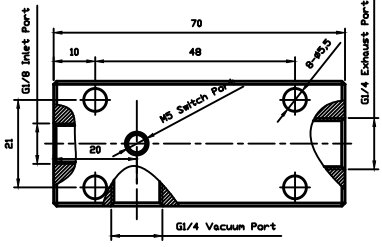

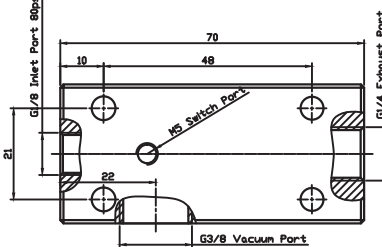



Vacuum generator medium vacuum level



Vacuum generator high vacuum level

Order Information

Picture	Ariticle no.	Operate pressure (bar)	Air Consumpt. (l/min)	Suction rate (l/min)	Vacuum level (bar)	Color	Dimension in mm
	VPM-20	5	36	40	0.7	Blue	
	VPH-20	5	47	36	0.92		
	VPM-22	5	36	40	0.7		
	VPH-22	5	47	36	0.92		
	VPM-24	5	36	40	0.7		
	VPH-24	5	47	36	0.92		

Vacuum Generator

For more nozzle diameter on request
For more information and dimensions please contact sales@flexyvacuumcups.com

Vacuum Generator

Vacuum Generator



Vacuum Generator Properties

Material	Color	Temp. Range
Aluminum	Blue	-10° - 80°C



Vacuum Generator

- Our vacuum generator you will find in the nozzle 1 mm .
- Our vacuum generator use for generate vacuum by compress air.
- Optimized for all handling application



Vacuum generator high vacuum level

Order Information

Picture	Article no.	Operate pressure (bar)	Air Consumpt. (l/min)	Suction rate (l/min)	Vacuum level (bar)	Color	Dimension in mm
	FVP-20						
	FVP-22	5	35	40	0.85	Blue	
	FVP-24						

Vacuum Generator

For more nozzle diameter on request
For more information and dimensions please contact sales@flexyvacuumcups.com

Flexy Oval 20x60



OV Series

COMBiFlex

Vacuum Cup Properties

Material	Color	Temp. Range	Shore Hardness
Polyurethane	Blue	5°– 50°C	40° Shore A



Flexy Oval Cups

- Our Oval family you will find in the sizes Ø 20x60 mm .
- Our Oval cups you will find in standard hardness 30/60 shore A. The 1.5 bellow cup which makes the cup stable and durable with excellent sealing properties and good for narrow workpiece.



Flexy Oval 20x60 Cups

Vacuum Pump



Vacuum Pump


Vacuum Pump Properties

Material	Color	Temp. Range
Aluminum	Silver	-10°- 80°C




Vacuum Pump

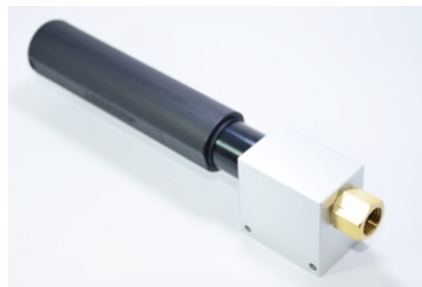
- Our vacuum pump you will find in the nozzle 2 mm .
- Our vacuum pump use for generate vacuum by compress air.
- Optimized for all handling application



Vacuum pump high vacuum level

Order Information

Picture	Article no.	Operate pressure (bar)	Air Consumpt. (l/min)	Suction rate (l/min)	Vacuum level (bar)	Color	Dimension in mm
	ASP20-04HV-SLC	4	180	90	- 0.85	Silver	Please see below

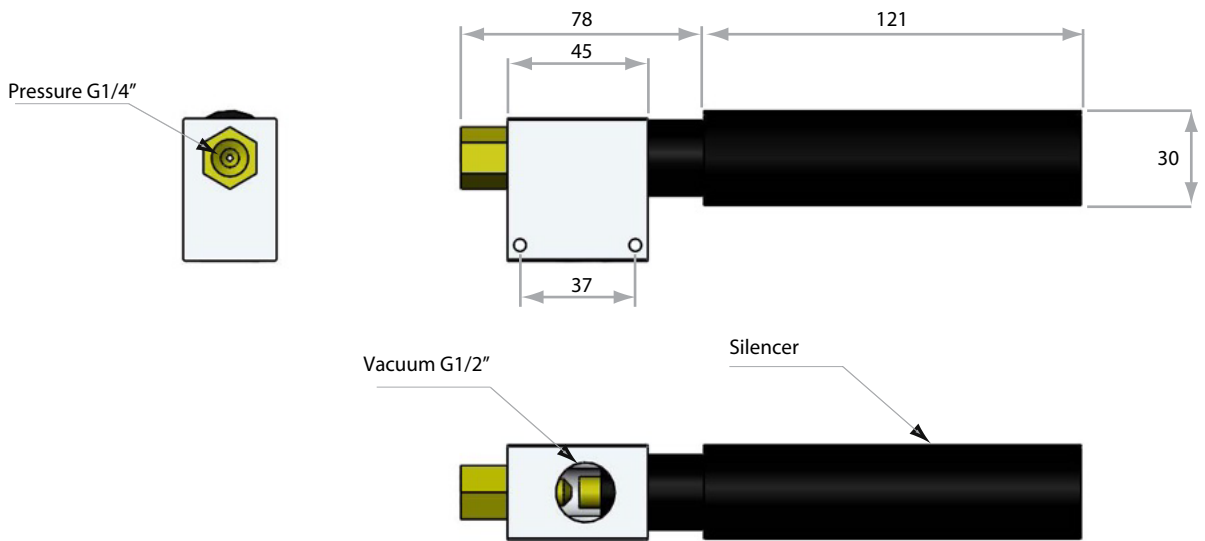

Vacuum Pump

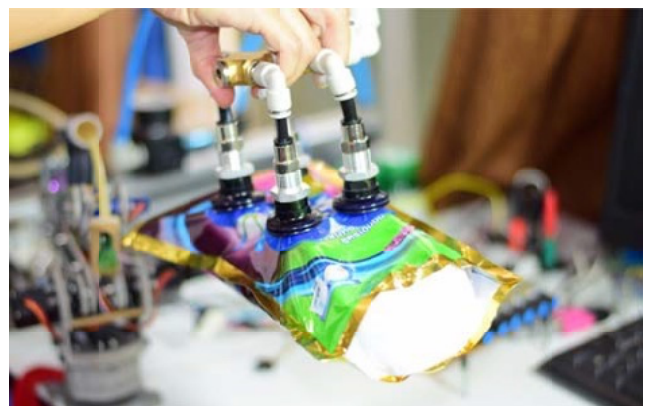
For more diameter on request
 For more information and dimensions please contact sales@flexyvacuumcups.com

Industry Solution Pictures

Metal sheet / automotive



Packaging



Application Pictures

Plastic



Carton box / other

